



airfel

Play
it
COOL



LXDY SERIES

Play it cool with the highest level of comfort brought to you by our expertly designed airconditioning solutions!



A. A. A

Unique Auto Airflow
Adjustment

Fan speed will adjust automatically to suit the duct design, providing desired air flow and quiet operation



Standard Built-In
Drain Pump

Reinforced drainage protection due to a standard built-in drain pump wherein up to 750mm of condensate water can be pumped



Refrigerant
Radiation Technology

Improved refrigerant radiation technology that cools down the E-box efficiently

AIRFEL MODEL NO	IDU		LXDYEQ20VIE	LXDYEQ25VIE	LXDYEQ36VIE	LXDYEQ48VIE	LXDYEQ54VIE
	ODU		MXYEQ20VIED	MXYEQ25VIED	MXYEQ36VIED	MXYEQ48VIED	MXYEQ54VIED
Power supply		V,Hz,Ph	220-240V,50Hz,1Ph				
Cooling (T1)	Capacity	Btu/h	19000	25300	34800	48000	54100
	Input	W	1487	1951	2806	4000	4400
	Current	A	6.60	8.61	12.50	17.89	19.62
	EER	Btu/h/W	12.78	12.97	12.40	12.00	12.30
Cooling (T3)	Capacity	Btu/h	16800.0	22400	31400	45000	48100
	Input	W	1858.0	2413	3470	5172	5278
	Current	A	8.2	10.56	15.34	22.94	23.42
	EER	Btu/h/W	9.04	9.28	9.05	8.70	9.11
Heating	Capacity	W	6100	8070	10000	17000	17700
	Input	W	1532	2152	2439	4579	4370
	Current	A	6.73	9.45	11.04	20.39	19.50
	COP	W/W	3.98	3.75	4.10	3.71	4.05
Indoor air flow (Hi/Med/Lo) at rated ESP		m ³ /h	970/805/630	1365/1100/880	2250/1880/1360	2630/2050/1450	3000/2450/1900
ESP	Rated	Pa	25	25	37	50	50
	Range	Pa	0-80	0-100	0-120	0-160	0-160
Indoor Unit Sound Pressure (Hi/Med/Lo) at rated ESP		dB(A)	43.5/39/34	40/38/36	49/46/43	51/48/44	51/48/44
Indoor unit	Dimension (WxDxH)	mm	880x674x210	1100x774x249	1200x874x300	1200x825x380	1400x858x440
	Packing (WxDxH)	mm	1070x725x270	1305x805x305	1405x915x355	1485x875x450	1605x910x505
	Net/Gross weight	kg	25.8/31.6	32.6/40.3	44.5/53.1	56.8/66.1	75.3/86.6
Controller			Wired Remote control				
Qty/per 20' /40' /40'HQ		Indoor	120/264/297	77/161/184	62/130/149	59/124/125	35/72/86
Compressor	Type		INVERTER ROTARY				
Outdoor Unit Sound Pressure Level		dB(A)	58.5	58	63	64	64
Outdoor unit	Dimension (WxDxH)	mm	890x342x673	946x410x810	946x410x810	952x415x1333	952x415x1333
	Packing (WxDxH)	mm	995x398x740	1090x500x875	1090x500x875	1095x495x1460	1095x495x1460
	Net/Gross weight	kg	41/44.3	58.6/63.2	66.0/70.9	99.3/112.2	99.9/112.8
Refrigerant	Type		R410A				
	Charged volume	kg	1.6	2.2	3.2	4.4	4.6
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35/12.7(1/4"/1/2")	9.52/15.9(3/8"/5/8")	9.52/19.3(3/8"/3/4")	9.52/19.3(3/8"/3/4")	9.52/22.3(3/8"/7/8")
	Max. pipe length	m	25	25	30	50	50
	Max. difference in level	m	15	15	20	30	30
Ambient temperature	Cooling	°C	0~52				
	Heating	°C	-15~-24				

OTHER FEATURES



Easy Maintenance

Due to easy-open panel from the bottom, large opening on the side, and ability to pull out filter from all directions



High Static Pressure

New fan design improves air flow through the air outlets



Gold Coat


Anticorrosive golden coating to protect against harsh conditions and improve heat efficiency



WiFi Controller*

*Optional

WiFi stick and smart kits are available for easier and more comfortable operation through an easily accessible mobile app

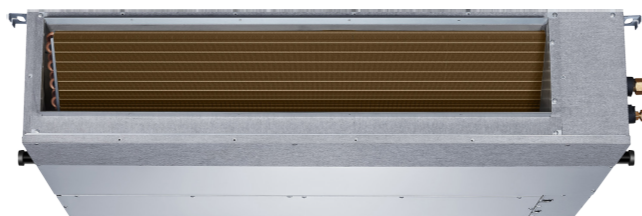

LXDDY

SERIES

FIND OUT MORE



airfel



LXDDY UAE | JUNE2024