


airfel

Play
it
COOL

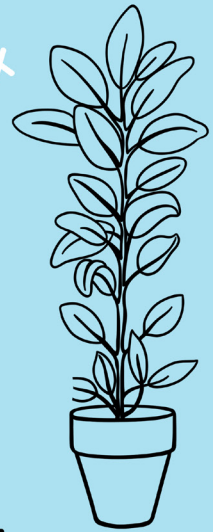

LXTY SERIES

Play it cool with our highly efficient and affordable split unit!



Turbo Cool

High-frequency compressor start-up technology for instant cooling



Gold Coat

Anticorrosive golden coating to protect against harsh conditions and improve heat efficiency



3D Airflow

Direct airflow horizontally and vertically for consistent cooling

AIRFEL MODEL NO		IDU	LXTYEQ30VIE	LXTYEQ36VIE
		ODU	MXTYEQ30VIEW	MXTYEQ36VIEW
Power supply		V,Hz,Ph	220-240V,50Hz,1Ph	
Cooling(T1)	Capacity	Btu/h	28000	33000
	Input	W	2170	2635
	Rated current	A	9.81	11.78
	EER	(Btu/h)/W	12.90	12.52
Cooling(T3)	Capacity	Btu/h	23500	26400
	Input	W	2530	2916
	Rated current	A	11.34	13.00
	EER	(Btu/h)/W	9.29	9.05
Heating	Capacity	W	8350	9900
	Input	W	2170	2675
	Rated current	A	9.79	11.95
	COP	W/W	3.85	3.70
Compressor	Type		Twin-Rotary Inverter	
Indoor air flow (Turbo/Hi/Mi/Lo)		m3/h	1620/1300/1110/980	1550/1440/1245/1100
Indoor Unit Sound Pressure level (Turbo/Hi/Mi/Lo/Breeze)		dB(A)	55/52/47/44	51.5/51/46/43
Indoor unit	Dimension(W*D*H)	mm	1259x282x362	1350x272x365
	Packing(W*D*H)	mm	1340x450x380	1475x460x375
	Net/Gross weight	kg	19.9/27.5	21.3/28.5
Outdoor Unit Sound Pressure level		dB(A)	59.	63
Outdoor unit	Dimension(W*D*H)	mm	946x410x810	946x410x810
	Packing(W*D*H)	mm	1340x450x380	1090x500x875
	Net/Gross weight	Kg	62.2/70.5	64.8/73.4
Refrigerant type & Weight		Kg	R410A / 2.35	R410A / 2.8
Refrigerant piping	Liquid side/Gas side	mm(inch)	9.52/19(3/8"/3/4")	9.52/19(3/8"/3/4")
	Max. refrigerant pipe length	m	50	50
	Max. difference in level	m	25	25
Thermostat type			Remote Control	
Application area		m2	36~53	45-66
Ambient temperature	Cooling	°C	18~52	
	Heating	°C	-15~24	

OTHER FEATURES



Leak Protect



Smart
Diagnosis



Eco Mode



Fireproof
Electric
Control Box



High Efficiency
Refrigerant Tube



LXTY
SERIES

FIND OUT MORE



airfel



LXTY UAE | JUNE2024